


## Product Information

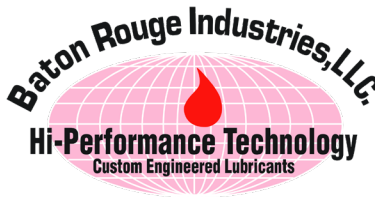

Baton Rouge Industries, LLC  
5319 Groom Rd · P.O. Box 26  
Baker, Louisiana 70714  
1-800-232-0334 · 225-775-3362  
Fax: 225-775-3498  
BatonRougeIndustries.com

## **L-630-S SYNTHETIC E.P. GEAR LUBRICANT 75w90**

01/01/25

### Description

**L-630-S Synthetic E.P. Gear Lubricant** is formulated with superior quality polyalphaolefin synthetic base oils and fortified with advanced additives to meet the stringent API GL-5 requirements for today's high demand vehicles and heavy equipment.

**L-630-S Synthetic E.P. Gear Lubricant** offers extended drain interval capabilities, excellent protection from heat, wear, and thermal breakdown and foaming to provide optimum lubrication and performance transmissions and gearboxes which require an EP GL-5 gear lubricant.

### Composition

**L-630-S Synthetic E.P. Gear Lubricant** contains the following additives for maximum performance and positive lubrication:

- Rust & Oxidation Inhibitors
- Anti-Wear Additives
- Anti-Foam Additives
- Demulsifier Additives
- Seal Conditioners
- Extreme Pressure Additives

### Application

**L-630-S Synthetic E.P. Gear Lubricant** meets and/or exceeds the following performance requirement approvals: API Service Classifications GL-5 and MT-1, MIL-L-2105D/MIL-PRF-2105E, Meritor Automotive O-76-E (75W-90) and O-76-B (80W-140), Eaton Axle Division Bulletin 88-102, Mack Trucks GO-J Plus (75W-90) and GO-J (80W-140), Navistar TMS 6816, Dana Corporation, Axle Division.

**PS-163 (E500-500,000-mile drain interval Roadranger® Extended Warranty) PS-037 (E500-500,000-mile drain interval Roadranger® Extended Warranty)**

<b>Specifications</b>	<b>SAE Grade</b>	<b>75w90</b>
Viscosity @ 40°C, cSt		122
Viscosity @ 100°C, cSt		16.6
Viscosity @ 100 °F, SUS		627
Viscosity @ 210 °F, SUS		86
Viscosity Index		147
Flash point, °F		400
Pour Point, °F		<-50
Demulsibility		Pass
Timken Load Rating		50
Color		Amber

