


Product Information

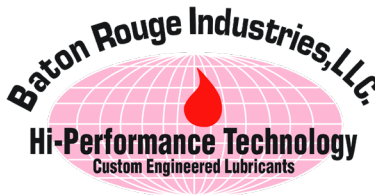

Baton Rouge Industries, LLC
5319 Groom Rd · P.O. Box 26
Baker, Louisiana 70714
1-800-232-0334 · 225-775-3362
Fax: 225-775-3498
BatonRougeIndustries.com

L-624 INDUSTRIAL GEAR LUBRICANT

01/01/25

Description

L-624 Industrial Gear Lubricant is a superior quality lubricant specially formulated for lubrication of enclosed industrial gears requiring US Steel 224 and AGMA 250.04 or AGMA 251.02 type lubricants. In addition, L-624 is excellent for lubricating slide and way systems, and other machine tools requiring a general-purpose oil.

Composition

L-624 Industrial Gear Lubricant is formulated with 100% paraffin base oils with a naturally high film strength and viscosity index and fortified with the following additives to provide optimum positive lubrication:

- Rust & Oxidation Inhibitors
- Demulsifier Additives
- Viscosity Index Improvers
- Pour Point Depressants
- Adhesive & Cohesive Agents
- Anti-Wear Additives
- Tackifiers
- Heat Dissipants
- Extreme Pressure Additives
- Silicone
- Anti-Foam Additives
- Oiliness Additives
- Seal Conditioners
- Friction Modifiers

Applications

L-624 Industrial Gear Lubricant meets and/or exceeds the following requirements: US Steel 224, AGMA 250.04 & AGMA 251.02, David Brown ET-19, Cincinnati Milicron P-47, P-50, P-74, P-76 and P-77, DIN-51517, MIL-L-6086C, MIL-L-46017.

Do not use **L-624 Industrial Gear** Lubricant in hypoid gear sets or in API GL-5, MIL-L-2105 applications found in automotive & trucking applications.

Specifications						
ISO Grade	68	100	150	220	320	460
AGMA Grade	2	3	4	5	6	7
Viscosity @ 100 °F, SUS	315	465	700	1000	1500	2150
Viscosity @ 210 °F, SUS	55.4	64.5	77.1	96.8	114.9	148.1
Timken Load, Lbs.	65	65	65	65	65	65
Viscosity Index min.	95	95	95	95	95	95
Flash point, °F	460	460	460	460	460	460
Rust Test	Pass	Pass	Pass	Pass	Pass	Pass
Pour Point, °F	-25	10	10	15	10	15
FZG Gear Test	+12	+12	+12	+12	+12	+12

