


Product Information

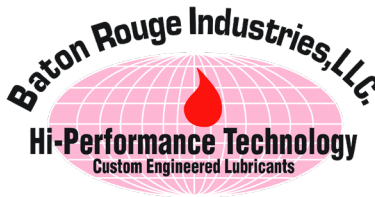

Baton Rouge Industries, LLC
5319 Groom Rd · P.O. Box 26
Baker, Louisiana 70714
1-800-232-0334 · 225-775-3362
Fax: 225-775-3498
BatonRougeIndustries.com

L-605-FS 10W30

Aero Flow HD Motor Oil (Full Synthetic)

01/01/25

Description

L-605-FS Full Synthetic 10W30 Motor Oil provides high quality engine protection under all driving conditions and is formulated with full synthetic base stocks and a premium additive package to provide extra protection against the harmful effects of city driving, where cars undergo higher stress due to constant stopping and going.

L-605-FS Full Synthetic 10W30 Motor Oil low friction formula helps improve gas mileage for long engine life and helps protect against rust, corrosion, startup wear, varnish build-up, and eliminates the need for extra oil additives. It also protects against thermal breakdown which helps prevent stuck rings.

Features/Benefits

- Protects engines under all driving conditions
- Lowers friction and improves gas mileage
- Provides longer engine life
- Protects against rust, corrosion and varnish
- Resists thermal breakdown

Application

L-605-FS Full Synthetic 10W30 Motor Oil meets requirements of API SP/GF6-A service. **L-605-FS Full Synthetic 10W30 Motor Oil** meets or exceeds the demanding requirements of International Lubricant Standardization and Approval Committee (ILSAC) GF-5, GF-4, GF-3, GF-2. ILSAC GF-5 comprises the latest standard for passenger cars, van, light truck and sport utility vehicles motor oils. This product is also recommended for older engines, which the owner's manual calls for API SN, SM, SL, SJ, SH, SG, SF, SE Service Classifications or any combination thereof. Viscosity recommendations vary according to temperature and engine manufacturer.

Specifications	SAE Grade	10W30
Specific Gravity, (60°F)		31.6
Viscosity, @ 40°C, cSt		64.2
Viscosity, @ 100°C, cSt		10.3
Viscosity Index		149
Cold Crank, cP at °C, Max		7000 @ -25C
Flash Point, °C (°F)		226 (439)
Pour Point, °C (°F)		-37 (-38)
Noack Volatility %, Max		13
High Temp/High Shear Visc, cP @150°C, Min		2.9
Color		2.5
Phosphorus, wt%		0.07
Zinc, wt%		0.08