


## Product Information

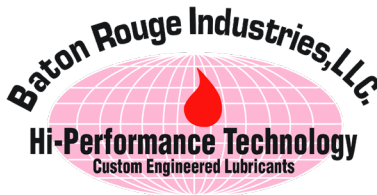

Baton Rouge Industries, LLC  
5319 Groom Rd · P.O. Box 26  
Baker, Louisiana 70714  
1-800-232-0334 · 225-775-3362  
Fax: 225-775-3498  
BatonRougeIndustries.com

## **M-25 NON-MELT RED E.P. GREASE** **“The Original Red Grease” NLGI 1 & 2**

01/01/25

### Description

**M-25 Non-Melt Red E.P. Grease** is a superior quality, multi-purpose E.P. grease formulated with PTFE to reduce friction and wear for heavy duty applications. **M-25 Non-Melt Red E.P. Grease** is formulated with organically treated bentone thickeners and will not melt and run out at high temperatures.

### Composition

**M-25 Non-Melt Red E.P. Grease** is formulated with virgin, 100% paraffin base oils with the highest natural film strength and viscosity index on the market today. In addition, **M-25 Non-Melt Red E.P. Grease** is fortified with the following additives, to enhance performance and provide optimum positive lubrication:

|                               |                     |                    |
|-------------------------------|---------------------|--------------------|
| Rust & Oxidation Inhibitors   | Anti-Wear Additives | Stabilizing Agents |
| Adhesive & Cohesive Additives | PTFE Resins         | Oiliness Additives |
| Extreme-Pressure Additives    | Friction Modifiers  |                    |

### Application

**M-25 Non-Melt Red E.P. Grease** is a versatile, multi-functional grease and is excellent in most applications where a high temperature or non-melt grease is applicable.

- |                       |                          |                   |                       |
|-----------------------|--------------------------|-------------------|-----------------------|
| • Chassis Lubrication | • Anti-Friction Bearings | • Roller Bearings | • High Speed Bearings |
| • Plain Bearings      | • Heavy Equipment        | • Sleeve Bearings | • U-Joints            |
| • Slides & Ways       | • Flexible Couplings     | • Gear Motors     | • Fan Bearings        |
| • Conveyor Bearings   | • Slow Speed Bearings    | • Cables          | •                     |

### Performance Characteristics

**M-25 Non-Melt Red E.P. Grease** is formulated for a wide range of applications to provide superior protection against:

- |                   |                    |                     |               |
|-------------------|--------------------|---------------------|---------------|
| • Friction & Wear | • Rust & Oxidation | • Extreme Pressure  | • Shock Loads |
| • Water Washout   | • Pound Out        | • High Temperatures | • Abrasives   |

| <u>Specifications</u>   |                 |         |
|-------------------------|-----------------|---------|
| NLGI Grade              | 2               | 1       |
| Base Oil @ 100 °F, SUS  | 450             | 100     |
| Base Oil @ 210 °F, SUS  | 60              | 60      |
| Worked Penetration      | 265-295         | 355-385 |
| Thickener               | Bentone         | Bentone |
| Texture                 | Buttery/Stringy | Buttery |
| ASTM Dropping Point, °F | None            | None    |
| Timken Load Rating      | 65 lbs.         | 65 lbs. |