


Product Information

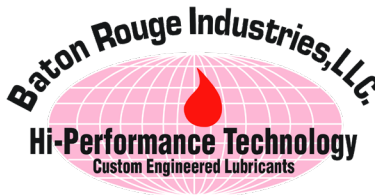

Baton Rouge Industries, LLC
5319 Groom Rd · P.O. Box 26
Baker, Louisiana 70714
1-800-232-0334 · 225-775-3362
Fax: 225-775-3498
BatonRougeIndustries.com

L-623 TRUE OPEN GEAR LUBRICANT (CRATER COMPOUND)

01/01/25

Description

L-623 True Open Gear Lubricant is a crater type viscous, black, asphaltic base lubricant specially formulated to cushion and lubricate open and exposed gears, chains, cables and wire ropes which are consistently exposed to open weather conditions.

Composition

L-623 True Open Gear Lubricant is precision formulated with a pronounced stringiness that provides more positive lubrication because the strings adhere to the moving gear teeth and are fortified with the following additives for optimum positive lubrication:

- Rust & Oxidation Inhibitors
- Anti-Wear Additives
- Molybdenum Disulfide Adhesive & Cohesive Agents
- Friction Modifiers
- Extreme-Pressure Additives

Applications

L-623 True Open Gear Lubricant is a very viscous product and may require heating during cold weather conditions.

L-623 True Open Gear Lubricant can be applied by paddle, pouring, brushing or by hand with protective rubber gloves.

| Specifications | | |
|------------------------|-------------|-------------|
| | Light Grade | Heavy Grade |
| Flash point, °F | 490 | 518 |
| Pour Point, °F | 64 | 90 |
| Viscosity @ 210°F, SUS | 815 | 1525 |
| Timken Load Rating | 65 lbs. | 65 lbs. |