


Product Information

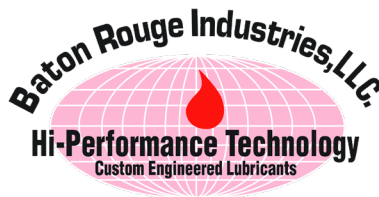

Baton Rouge Industries, LLC
5319 Groom Rd · P.O. Box 26
Baker, Louisiana 70714
1-800-232-0334 · 225-775-3362
Fax: 225-775-3498
BatonRougeIndustries.com

L-605-SB 20W50

Aero Flow HD Motor Oil (Synthetic Blend)

01/01/25

Description

L-605-SB 20W50 Motor Oil provides high quality engine protection under all driving conditions and is specifically formulated to provide extra protection against the harmful effects of city driving.

L-605-SB 20W50 Motor Oil low friction formula helps improve gas mileage, extend engine life and helps protect against rust, corrosion, startup wear and varnish build-up. It also protects against thermal breakdown which helps prevent stuck rings.

Features/Benefits

- Protects engines under all driving conditions
- Lowers friction and improves gas mileage
- Provides longer engine life
- Protects against rust, corrosion and varnish
- Resists thermal breakdown

Application

- On the highway applications for light and heavy-duty trucking.
- Off the highway applications such as trucking, construction, agriculture and quarrying.
- Various mixed fleet applications.

Performance Capabilities

- API CH-4, CI-4, CD
- API SL, SJ, SH, SG
- API SP/GF6-A

Specifications	SAE Grade	20W50
Specific Gravity @ 60 °F		28.9
Viscosity, Kinematic cSt at 40°C		166.9
cSt at 100°C		18.4
Viscosity Index		123
Cold Crank, cP at °C, Max		9500@ -15C
Flash Point, °C (°F)		230 (448)
Pour Point, °C (°F)		-28 (-24)
Color, Max		4.5
TBN		9.0