


## Product Information

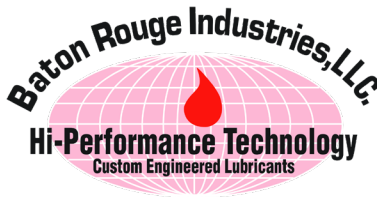

Baton Rouge Industries, LLC  
5319 Groom Rd · P.O. Box 26  
Baker, Louisiana 70714  
1-800-232-0334 · 225-775-3362  
Fax: 225-775-3498  
BatonRougeIndustries.com

## **L-617 HI-TACK CHAIN LUBE SAE 50w**

01/01/25

### Description

**L-617 Hi-Tack Chain Lube w/Moly** is a superior quality chain lubricant custom formulated to offer the best possible lubrication and prolong the life of chains, sprockets, rails, pins, and rollers used in heavy-duty applications. **L-617 Hi-Tack Chain Lube w/Moly** offers an adhesive/cohesive characteristic and clings to chains without slinging or dripping off for maximum positive lubrication.

### Composition

**L-617 Hi-Tack Chain Lube w/Moly** is formulated with 100% paraffin base oils with naturally high film strength, penetrants to penetrate and lubricate inner pins and rollers and the following additives to provide optimum lubrication for heavy-duty applications.

Rust & Oxidation Inhibitors  
Friction Modifiers  
Extreme Pressure Additives

Anti-Wear Additives  
Molybdenum Disulfide

Adhesive & Cohesive Additives

### Applications

**L-617 Hi-Tack Chain Lube w/Moly** is excellent for many applications such as industrial & agricultural chains, sprockets, rails, pins, rollers, cables, & wire ropes.

Specifications	SAE Grade	50w
Specific Gravity @ 60 °F		0.8840
Viscosity, Kinematic cSt at 40°C		139.3
cSt at 100°C		15.0
Viscosity Index		109
Viscosity, Brookfield cP at -26°C Max		150,000
Flash Point, °F		407
Pour Point, °C (°F)		-30 (-22)
Color		<3.5